

MASABA



www.masabainc.com

Portable Feeder Hopper

Portable 9'x16' Feeder Hopper

Main Frame and Chassis

- Single Axle Chassis
- Total Weight: **28,120 lbs**
 - Heavy Duty wide flange beam
- (4) 11R x 22.5 radial tires
- Brakes
- Lights
- (2) Crank-down Landing Jacks
- Mudflaps

Hopper

- Dimensions: **9' x 16'**
- Volume: **18 cubic yards**
- Constructed of 1/4" mild steel
- Adjustable Rubber Flashing
- Full Length Skirting on Feeder Belt

42" Inclined Belt Feeder

- **30 hp**
- Adjustable Belt Speed
- Class II Head Drive
- Dodge TXT 625 Gear Reducer
- CEMA C Idlers
- Impact Bed Idlers
- 3 Ply Belting with Mechanical Splice
- Belt Scraper

Features

- Paint
 - (1) Coat 2-part Urethane Primer
 - (1) Coat Urethane Paint
- Steel-shot blasted
- (2) Owner's manual for start-up and maintenance

Options

- Grizzly (shown)
 - 3/4"x4" bar capped with 3/4"x3"
 - 6" Spacing
 - **15 hp** Hydraulic Lift Grizzly
 - Manual Lift grizzly
- Switchgear
 - NEMA 4 Enclosure
 - Variable Frequency Drive
- Adjustable Grizzly Braces
 - Allow Grizzly Tilt to Either Side
- Vulcanized Belt Splice


STRENGTH
YOU CAN DEPEND ON!

MASABA

1617 317th Street - PO Box 345, Vermillion, South Dakota 57069 USA, www.masabainc.com, 877-627-2220 or 605-624-9555

BENEFITS OF MASABA

With Masaba, you get three generations of industry knowledge, so our Feeder Hoppers are designed, built, and proven to withstand the rough quarry environment. The hopper (1) is built with 1/4" mild steel and features full-length adjustable rubber flashing. This 42" Belt Feeder (2) is inclined to increase discharge height and lives up to Masaba's reputation of hard-working conveyors. This rugged unit is built around the strongest chassis in the industry. A Heavy Duty Wide Flange Beam Chassis (3) provides this completely portable unit with the strongest and sturdiest base available.

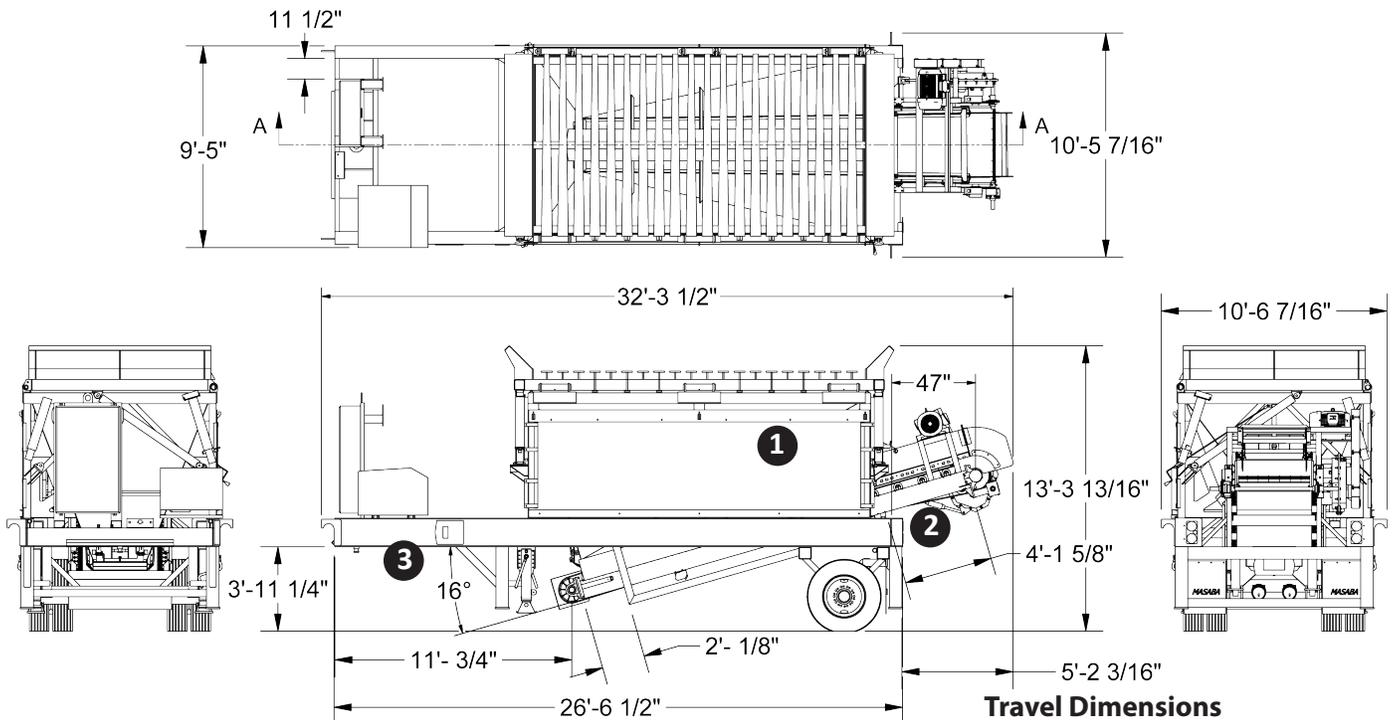

Travel Dimensions
 32'-3 1/2" l x 10'-5 7/16" w x 13'-3 13/16" h

Weight
 Kingpin: 7,770 lbs
 Axle: 20,350 lbs

NOTE: Listed weights are not exact. Actual weights will vary based on screen size, brand, options, etc.



Masaba Strong chassis



42" Inclined Belt Feeder



Optional Hydraulic Grizzly Bars
 6" Spacing



MASABAinc.com
 1-877-627-2220
 info@MASABAinc.com

REVISION December 2013

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because MASABA, Inc. may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by MASABA, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of MASABA, Inc. are subject to the provisions of its standard warranty. MASABA, Inc. does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.